Liquid Trade Waste

Category 2 Classification B - Motor Trades



Definition

Liquid trade waste (LTW) is any discharge to a sewerage system other than domestic waste from a hand wash basin, shower, bath or toilet.

Central Coast Council is referred to as Council.

Introduction

This Fact Sheet is provided to assist you to treat and dispose of liquid trade waste in an efficient and approved manner.

For further information, please contact Council's Trade Waste Section on 4306 7900. For LTW application forms, refer to www.centralcoast.nsw.gov.au.

Activities

Mechanical repair activities include the following facilities:

- A stand-alone garage
- A stand-alone mechanical workshop
- A service station workshop
- Lawnmower repairers that conduct mechanical repairs only and no other processes
- Motor boat repairers that conduct mechanical repairs only and no other processes
- Pre-treatment
- A collection well and non-emulsifying pump must be provided to collect:
- Water used for washing of mechanical equipment or parts
- Floor wash down

What pre-treatment is required?

The installation required to treat the waste water is a coalescing plate interceptor (CPI/CPS) with a minimum capacity of a 1000 L/h or a vertical gravity separator (VGS) or hydrocyclone separation system (HSS) sized according to the influent flow rate. If your flow rate exceeds 1000 L/h, you will require a larger capacity and must provide supporting information regarding sizing and recommended maintenance schedule.

Make sure the unit is correctly installed, and where applicable the distributer or supplier must be able to guarantee supply of parts and service maintenance.


- Fit a basket arrestor or screen to all floor wastes that drain to the sewerage system, to strain out gross solids such as rags and packaging.
- If you cannot avoid using detergents, use only quick-break detergents, as oil arrestors are more efficient if detergents are not used.
- Clean using high water pressure where possible.
- Use only non-emulsifying pumps to pump the liquid waste to the separator.
- Do not discharge degreaser into the sewerage system.

NOTE: Double and triple interceptor pits and general purpose pits are not approved or appropriate pre-treatment equipment units for this type of wastewater.







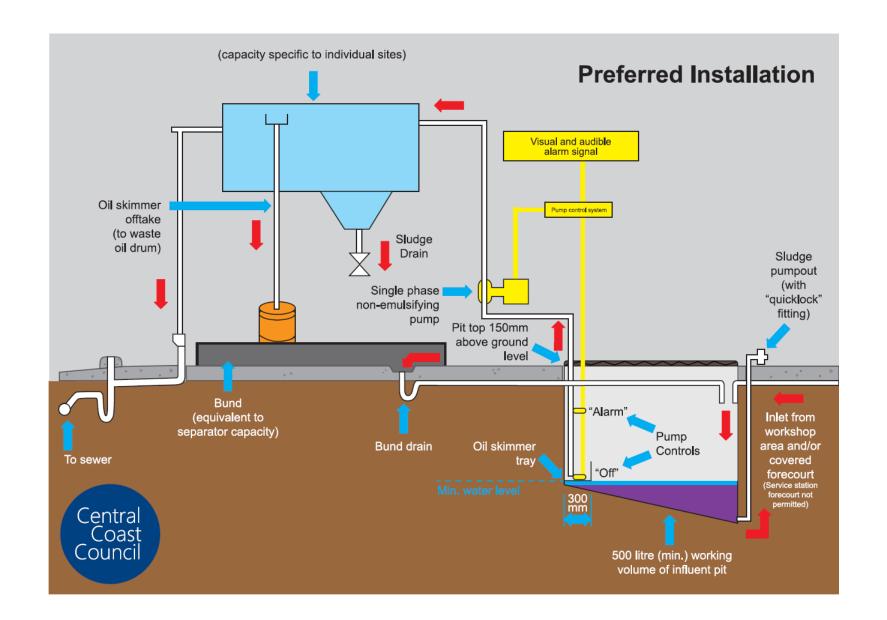







Coalescing Plate Interceptor (CPI)

Note: rectangular box above ground This is an oily water separator. All waste oils and coolants should be disposed via a licenced contractor and not put through the Coalescing Plate Interceptor (CPI) or discharged to sewer. inlet pipe square cone sludge hopper baffle slows outlet pipe baffle flow and for clean removes water leaves & grit outlet pipe **∄** valve for oil Central Coast Council sludge oil container container to sewer







Stormwater

The wash area must be roofed to exclude rainwater from the sewerage system.

Make sure stormwater is diverted away from the wash area(s).

Housekeeping practices

- If you cannot avoid using detergents, use only quick-break detergents, to assist the separation process where any type of oil arrestor is used as pre-treatment
- Dry clean oil spills prior to wash down
- Scrape up grease blobs before wash down
- Consider using screens to exclude nuts, washers and the like from the pump intake
- Use only cleaning compounds that are compatible with the pre-treatment system
- Store oils, chemicals and solvents in a separate bunded area that cannot drain to the sewerage or stormwater systems

 Do not discharge petrol, diesel fuel, discrete oil, kerosene, solvents or any other flammable and/or explosive substances into the sewerage or stormwater system


Plumbing requirements

All plumbing should be installed as per Australian Standards AS/NZS 3500.2:2003 Plumbing and drainage – Sanitary plumbing and drainage.

For public health reasons, install all suitable backflow protection measures (or Mains Containment Protection) on the incoming water supply to the property. Such measures must be a Reduced Pressure Zone Device. Zone protection for prevention of backflow is recommended. The backflow protection measures must be approved and registered with Council.



Typical installation of Backflow Prevention Device

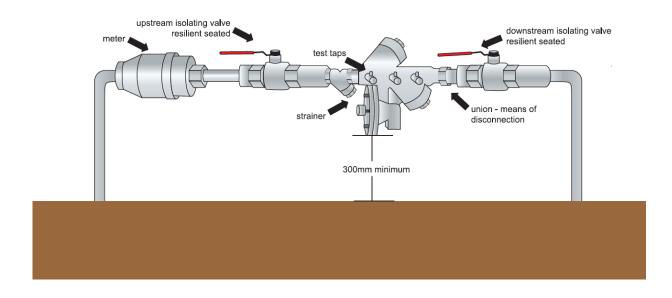







Business types

Activity	Characteristics of waste	Minimum Pre-Treatment Required
 Auto dismantler Bus/Coach depot wash bay area Car detailing Mechanical workshop Service stations (workshop only) Vehicle washing (commercial-manual cleaning) Vehicle washing (automatic robots) self service Vehicle washing (including engine degreasing) 	Oil, Grease, Suspended Solids, Petroleum Hydrocarbons, Metals, Solvents, Detergents Kerosene	Basket arrestor. Collection pit minimum capacity 300L. An oil interceptor/separator, sized accordingly.* Kerosene and solvents, if used, are not permitted into the sewer Reuse of wash water
Engine/gearbox reconditioning parts washing	Oil, Grease, Suspended Solids, Detergent, Kerosene, Lead	Basket arrestor. Collection pit minimum capacity 300L. An oil interceptor/separator, sized accordingly.* Kerosene is not permitted into sewer. Acid cracking, pH correction facility may be required.
Panel beater/spray painting	Oil, Grease, Suspended Solids	Basket arrestor. Collection pit minimum capacity 300L. An oil interceptor/separator, sized accordingly.* Discharge from a spray booth area is not permitted. Paint solvents, thinners are not permitted into the sewer.







Activity	Characteristics of waste	Minimum Pre-Treatment Required
Radiator repair	Suspended Solids, pH, Metal	 Solids settlement pit. Metal removal and pH adjustment may be required before discharge to sewer. Capture the radiator fluid in a tray or container before removing the radiator from the vehicle. Where possible, re-use radiator fluid, otherwise capture and store it for off-site removal by an EPA licenced contractor. Floor must be bunded to prevent spillage draining to sewer.
Service station covered forecourtBus/Coach depot refuelling bay	Exempt	Refer to Department of Industry Water, Water Circulation No. LWU13

^{*}An oil interceptor/separator should be of an approved type such as a coalescing plate interceptor, a vertical gravity separator or hydrocyclone separation system sized accordingly to the influent flow rate. Nominal size is 1000 L/h. Only "quick-Break" detergents should be used. Refer to separate documents for installation requirements and other information on this equipment.

Wash area must be roofed, bunded and graded to exclude stormwater.









Application to Discharge Liquid Trade Wastes into Council's Sewerage System

CATEGORY 2 – Classification	on B – Moto	Trades						
Date:	Fee Paid \$		Licence No	0:			Debtor:	
For further enquiries on th	e application	process, plea	se contact C	Customer Serv	ice 02	4300	6 7900.	
Business Trading Name						ABI	N:	
Development Application No. Lot No.			D.P.		Parcel No.).	Unit/House No.
Street			Suburb					Postcode
Approval Holder: (The nominated Approval Holder is res accordance with the Trade Waste approval terms and co			-	operating in Telephone No.			e No.	
				Email				
Approval Holder's Address:								
Approval Holders:								
Anyone can apply for approval but if the approval holder is not the owner of the land, then the owner's written consent to lodge the application is required. All correspondence and notice of determination will be sent to the approval holder. It is important to notify Council of any change of address and/or telephone number if this occurs during the processing of the application. By signing this application, you are acknowledging that you have read the notes and instructions on this form and the accompanying checklist, and have included all the requested information as it applies to this application								
Principal Business Activity								
Please supply a brief statement of the business type and processes generating liquid trade waste e.g. laundry, animal wash, dentistry etc								
Any water supply meter being installed? Dyes No Existing water meter number Meter location Mete			ation					
EXISTING / PROPOSED EQUIPMENT (GREASE ARRESTOR, BASKET ARRESTOR, COOLING PIT, DILUTION PIT, CPI, VGS, ETC)								
Туре	Type Size/flow rate							
PROPOSED CLEANING SCHEDULE OF PRE-TREATMENT EQUIPMENT AND NAMES OF CONTRACTORS USED								
Pre-treatment equipment			F	Frequ	uency (weeks)			
Name of Contractor Contact number								
Location of pre-treatment device (sample point if required, CPI, VGS)								
Refer to Council's <u>Liquid Trade Waste Policy</u> for the Liquid Trade Waste Quality Standards, which lists pollutants and their allowable limits								



SUBS	STANCES PROHIBITED FROM BEING DISCHARGED TO THE SEWERAGE SYSTEM				
The	following substances are prohibited from being discharged to the sewerage system:				
	 organochlorine weedicides, fungicides, pesticides, herbicides and substances of a similar nature and/or wastes arising from the preparation of these substances 				
	 organophosphorus pesticides and/or waste arising from the preparation of these substances 				
	any substances liable to produce noxious or poisonous vapours in the sewerage system				
	organic solvents and mineral oil				
	any flammable or explosive substances				
	discharges from 'Bulk Fuel Depots'				
	chromate from cooling towers				
	 natural or synthetic resins, plastic monomers, synthetic adhesives, rubber and plastic emulsions 				
	rain, surface, seepage or subsoil water, unless specifically permitted				
• solid matter					
	any substance assessed as not suitable to be discharged to the sewerage system				
 waste liquids that contain pollutants at concentrations which inhibit the sewage treatment process – refer National Wastewater Source Management Guideline, July 2008, WSAA 					
	any other substances listed in a relevant regulation.				
CHE	CKLIST FOR APPLICATIONS				
1.	Completed application with owner's signature				
2.	Two copies of plans showing:				
	• Details and location of all processes, tanks, pits and apparatus associated with the generation of commercial waste				
	 Details, location, capacity / dimensions, material of construction and lining of the proposed pre-treatment facilities 				
	Details of pipes and floor drainage conveying the effluent				
	Stormwater drainage plan				
3.	Nature of processes of the business attached				
4.	Any other relevant supporting documents e.g.				
	Environmental Impact Statement				
	 Consultant's Report EPA consideration / restrictions 				
	Details of chemicals being used and SDS				
	betails of elfermedis being used diffu 555				
The	applicant should be aware that approval of this application does not constitute a guarantee of any future approval of a va	riation to			
the a	approval. This will be dependent on the available capacity of the sewerage system at that time and any future approval me	ust not be			
assu	med. However, alerting the Council to the applicant's future plans and proposals may assist the Council in planning future	sewage			









management and / or infrastructure additions / modifications.

Property Owner Details and Consent:

The names and signatures of all owners should be shown in this section. (Written authority from the owner is required if a solicitor or agent is acting on behalf of the owner).

For application made on Crown land, whether leased or not, the owner's details must be signed by an officer of the Department of Lands who is authorised for these purposes, or Council's Authorised Officer if acting as custodian. (This must be signed prior to lodgement of an application)

If the property is owned by a Company, the application must be executed using the Company Seal or the appropriate director's signature. Any person signing on behalf of the Company must state the authority by which that person acts and print your name and position.

If signing on behalf of an Owners Corporation, signatures required are as follows:

- 1. where the proposed development is within the internal walls of the unit, the unit owner only
- 2. where the proposed development is in a courtyard or on common property,

Property Address:	
Property Owner's Name	Telephone No. / Email
Postal Address	

Signature of Property Owner/s

Owner's authorisation to making the application is mandatory as per Section 78 of the *Local Government Act 1993*Please note that the owner of the property will be billed for water supply, sewerage and liquid trade waste services provided and it is the owner's responsibility to pay such fees and charges within the period specified. The owner may arrange to recover such fees and charges through the lease agreement between the owner and the occupier.





